

Technical Data Sheet

Date of compilation: 09/08/2021

ARC LINE MARKING PAINT

DESCRIPTION


LINEMASTER is a blend of high quality pigments, resins, hardeners and fast drying solvents, suitable for use on asphalt, concrete, gravel and grass. It can be applied either by hand as a spot marker, or used in conjunction with a line marking applicator.

USES

LINEMASTER is suitable for use as a fast drying coating for line marking, survey marking, car park lines etc.

Type:

- Pigmented acrylic resin
- Lead free pigmentation
- Xylene free

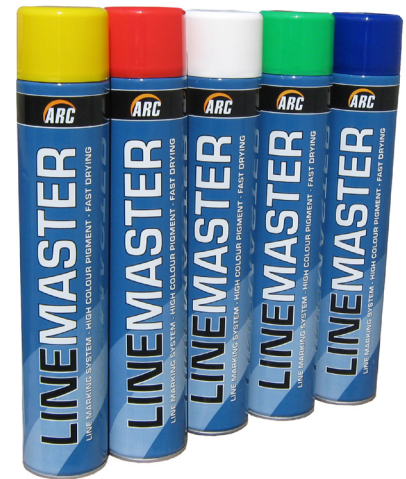

DIRECTIONS FOR USE

Ensure all surfaces are clean, dry and free from dust, grease, millscale etc. Shake the can for at least 1 minute after the agitator balls are heard rattling and again frequently during use. After use turn the can over and spray for 1-2 seconds until only gas comes out, ensuring that the can is pointing away from the user. Take care to avoid over spray onto surrounding areas, especially in windy conditions. Allow to dry for at least 2 hours before subjecting the marking to traffic.

DRYING TIME @ 20°C

Surface dry: 15 mins

Hard dry: 1 hour

Drying times will be extended at low temperatures.

Do not apply if ambient temperature falls below 10°C or relative humidity exceeds 90%.

COVERAGE

1 container of LINEMASTER will give between 60 and 100m of 50mm line when used in a standard machine, depending on application weight.

STORAGE & PACKAGING

Protect from sunlight and do not expose to temperatures exceeding 50°C. It is supplied in 750ml containers, 12 units/box, available in White, Yellow, Red, Blue & Green.

Technical Data Sheet

Date of compilation: 09/08/2021

ARC LINE MARKING PAINT

HEALTH & SAFETY

For more information and precautions for use refer to the safety data sheet.

NOTE

All products should be sold in accordance with the manufacturer's instructions. The manufacturer cannot be held responsible where conditions of use are beyond our control. Full information and advice is freely available from our Technical Services Department e-mail technical@arcbuildingproducts.ie. Whilst any information contained herein is to the best of our knowledge true and accurate, no warranty is given or implied in connection with any recommendations or suggestions made by us, our representatives, agents, or distributors, as the conditions of use and any labour involved are beyond our control. Our warranty is therefore limited to the quality of supplied product.